

Boletim Técnico da Escola Politécnica da USP
Departamento de Engenharia de Computação e
Sistemas Digitais

ISSN 1413-215X

BT/PCS/0511

**A Floor Controlled Centralized
Voice Conference System for
Distance Learning**

George Marcel M. A. Smetana
Tereza Cristina Melo de Brito Carvalho

São Paulo - 2005

O presente trabalho é parte da dissertação mestrado, apresentada por George Marcel M. A. Smetana, sob orientação da Profa. Dra. Tereza Cristina Melo de Brito Carvalho: "Um Sistema de Conferência Centralizada com Controle de Posse da Palavra para Educação à Distância", defendida em 10/02/2004, na EPUSP.

A íntegra da dissertação encontra-se à disposição com o autor e na Biblioteca de Engenharia de Eletricidade da Escola Politécnica da USP.

FICHA CATALOGRÁFICA

Smetana, George Marcel M. A.

A Floor controlled centralized voice conference system for distance learning / George Marcel M. A. Smetana, Tereza Cristina Melo de Brito Carvalho. -- São Paulo : EPUSP, 2005.

14 p. -- (Boletim Técnico da Escola Politécnica da USP, Departamento de Engenharia de Computação e Sistemas Digitais ; BT/PCS/0511)

1. Educação à distância (ferramentas) 2. Redes de computadores (Aplicações) I. Carvalho, Tereza Cristina Melo de Brito II. Universidade de São Paulo. Escola Politécnica. Departamento de Engenharia de Computação e Sistemas Digitais III. Título IV. Série
ISSN 1413-215X

A Floor Controlled Centralized Voice Conference System for Distance Learning

George Marcel M. A. Smetana, Reinaldo Matushima, Regina Melo Silveira,
Tereza Cristina M. B. Carvalho, Wilson Vicente Ruggiero

Laboratório de Arquitetura e Redes de Computadores (LARC) – Escola Politécnica (EP)
– Universidade de São Paulo (USP)

Av. Professor Luciano Gualberto, travessa 3, n. 158, sala C1-46 – CEP 05508-900 –
São Paulo – SP – Brazil

{gsmetana, matushim, regina, carvalho, wilson}@larc.usp.br

Abstract. *This paper describes a floor controlled centralized voice conference system developed for LARC's distance learning management system. An architecture for the multipoint conference system was proposed, implemented and tested. It was found that the system is scalable and that floor control reduces the interactivity among the conference's participants, but works efficiently as a mechanism for reducing the need for network resources. Text communications help lowering the impact of floor control on interactivity. The deployment of a centralized topology for multipoint conferences showed to be very advantageous, mainly because multicast traffic was not supported.*

Resumo. *Esse trabalho descreve um sistema de conferência centralizada com controle de posse da palavra desenvolvido para o LARC. Verificou-se que o sistema é escalável e que o controle de posse da palavra reduz o grau de interatividade entre os participantes da conferência, mas funciona eficazmente como mecanismo para reduzir a utilização dos recursos de rede. A comunicação adicional por texto ajuda a reduzir o impacto do controle de posse da palavra no grau de interatividade. O uso de uma topologia centralizada para a realização de conferências multiponto mostrou-se bastante vantajoso, principalmente porque o tráfego multicast não era suportado.*

1. Introduction

As distance learning usage grows, some of their tools try to incorporate virtual collaborative environments technologies and techniques to overcome natural barriers imposed by spatial separation, like lack of human-to-human interaction. Nonverbal communications, as gestures and eye-gaze, play important roles in face-to-face interactions. Videoconferencing helps raising interaction, but network delay and poor video quality harden attaining the same effect as physical presence and mutual awareness.

A virtual classroom for distance learning is one of the paradigms for collaborative environments proposed in [Qiu, Kuhns and Cox (2002)]. In this paradigm, the interaction among participants is asymmetric, that is, the audio and video streams of the teacher are transmitted to the students and, occasionally, a student is allowed by the

teacher to address the class. The virtual classroom paradigm is a particular specialization of the chaired conference paradigm, the teacher behaving like the chairman and the students, like the audience.

This paper describes a floor controlled centralized conference system developed for LARC's¹ distance learning tool. Floor control was used to regulate interaction and access to the audio channel and to restrict network bandwidth usage. A floor control protocol and a light session protocol were developed. Implementation was made using web technology in order to ease integration with web-based systems.

In Section 2, background information and some relevant related works are presented. Section 3 describes the system architecture, environment and implementation. Section 4 brings some experimental results regarding the floor control mechanism, the network bandwidth consumed and user experience and Section 5 discloses conclusions and future work.

2. Background

The conference terminology used in this paper was adapted from [H.323v4 (2000)] and [Rosenberg et al. (2002)]. Information about the Real-Time Transport Protocol (RTP) can be found in [Schulzrinne et al. (1996)]. Floor control can be found in [Dommel and Garcia-Luna-Aceves (1997)] and [Crowley, Milazzo, Baker, Forsdick and Tomlinson (1990)]. Network address translators (NATs), network address and ports translators (NAPT), their operation and problems associated can be found in [Holdrege and Srisuresh (1999, 2001)] and [Senie (2002)].

Although IP multicast consumes less bandwidth than IP unicast in multipoint conferences, it is not always possible to use it, because both the network infrastructure and the multimedia conference system (hardware and software) must support multicast traffic. Further, global scope conferences must have global multicast addresses, which are difficult to be obtained. IP unicast does not have these drawbacks, but consumes more bandwidth, a problem that can be mitigated by the use of floor control protocols, limiting the number of simultaneous senders.

Controlling participants' audio and video transmissions is necessary to limit the bandwidth consumed in videoconferences, but may reduce interactivity among the participants. For instance, in a centralized audio conference with N participants without floor control, the multipoint control unit (MCU) would receive N audio channels and forward each of them to $N - 1$ participants, resulting in $N(N - 1)$ audio channels being sent. Each participant would receive $N - 1$ audio channels. Without floor control, bandwidth rapidly becomes the main bottleneck for the scalability of conferences. Voice activity detection (VAD) and mixing help but do not eliminate the need of floor control for reducing the consumed bandwidth

3. System Architecture, Environment and Implementation

The conference system was built in order to reproduce the conversational dynamics of a classroom, where the interaction among participants is asymmetric, that is, the audio

¹ LARC's website: <http://www.larc.usp.br>. Accessed: 26.11.2003.

stream of the teacher is transmitted to the students and, occasionally, a student is allowed by the teacher to address the class, in order to ask/answer a question or to make comments. The use of the conference is not restricted to a virtual classroom, but it can be used in any chaired conference, where one participant has the social role of the moderator, regulating the interaction among the other participants.

The conference system can be used over local and wide area networks based on the TCP/IP architecture. In real world situations, remote users may be behind firewalls, NATs or NAPT's, hardening communication. The conference system requires firewalls to be configured to allow inbound and outbound UDP traffic.

The system architecture is shown in Figure 1 and its components are: web server, database server, MCUs server, MCUs, user web page and a user Java applet using the Java Media Framework (JMF).

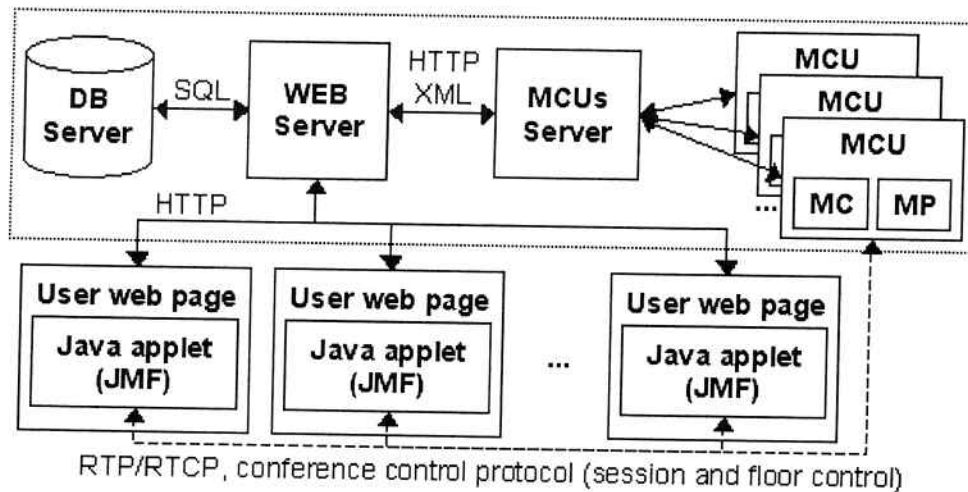


Figure 1. System architecture.

The web server hosts the management website and the conference website. User authentication is accomplished by the website design, with passwords and logins. Access to the management website is restricted to the system administrator. At the management website, the system administrator is able to: create, modify, monitor, delete, start and finish virtual conference rooms; create, modify and delete users and associate users to virtual conference rooms.

The database server records all these information.

Each virtual conference room has its own MCU and a set of participants. When a virtual conference room is started or finished, the management website sends a HTTP request to the MCUs server with the corresponding action, asking it to start or finish the associated MCU. The MCUs server sends a XML response indicating if the action requested was completed successfully or not. The MCUs server instantiates and destroys MCUs objects.

The MCU establishes point-to-point communication with each participant. The multipoint controller (MC) handles and forwards session and floor control packets, while the multipoint processor (MP) deals with the RTP/RTCP audio packets. The MCU is completely codec independent, since it does not realize mixing, nor any codec

conversion, which are processor intensive operations. A codec independent MCU is able to scale better than a dependent one.

The conference website displays the available virtual conference rooms to the user. The virtual conference room is represented by the user web page, which provides the human-machine interface.

The Java applet inside the user webpage provides the multimedia functionality and network communication with the MCU. The Java applet implements the RTP/RTCP, the session and the floor control protocols. Audio and text communications are available, but only audio is restricted to the floor holder.

3.1. System Requirements and Performance Issues

Table 2 shows server requirements, while Table 2 shows user requirements.

Table 1. Server requirements.

<i>Software requirements</i>	➤ Microsoft Windows 2000 Server ➤ Web server: Microsoft Internet Information Server 5.0 ➤ Database server: Microsoft SQL Server 2000 ➤ Sun Microsystems Java Virtual Machine (JVM) 1.4.2 or superior
<i>Hardware requirements</i>	➤ PC with 600 MHz or higher processor clock speed ➤ 512 MB of RAM or higher ➤ 100 MB of available hard disk space (plus disk space requirements for each software) ➤ Network adapter
<i>Network requirements</i>	➤ Upstream: at least 50 kbps per user in conference ➤ Downstream: at least 100 kbps per conference

Table 2. User requirements.

<i>Software requirements²</i>	➤ Windows 98, 2000 or XP ➤ Internet Explorer 5.5 or superior ➤ Sun Microsystems Java Virtual Machine (JVM) 1.4.2 or superior ➤ Sun Microsystems Java Media Framework Windows Performance Pack (JMF) 2.1.1e or superior
<i>Hardware requirements</i>	➤ PC with 350 MHz or higher processor clock speed ➤ 128 MB of RAM or higher ➤ 100 MB of available hard disk space ➤ Sound card: PCI, full-duplex and Creative Labs Sound Blaster compatible ➤ Video card: PCI or AGP, with 4 MB or greater ➤ 56 kbps analog modem, xDSL, Cable Modem or network adapter ➤ Microphone and headphone (speakers are not recommended)
<i>Network requirements</i>	➤ Internet access with at least 50 kbps available to the uplink and downlink

Server-side scripts were implemented using Microsoft Active Server Pages. Client-side scripts were implemented using JavaScript.

The MCU and the MCUs server were implemented in Java and thus can be hosted by several platforms.

² Operating system compatibility is due to the JMF Windows Performance Pack and browser compatibility is due to JavaScript client-side scripts in the user web page. Other browsers and operating systems may be supported in future versions of the conference system.

Available memory is crucial for the user Java applet, since it requires real-time processing. When the Java applet demands the use of virtual memory, the performance drops causing audio packets to be lost.

Network bandwidth is critical to the conference system. If there are N participants in a conference, the MCU must forward the audio and conference control packets received to $N - 1$ participants. For this reason, the server hosting the MCUs must have a high-speed Internet connection. If the conference system is supposed to serve up to five simultaneous conferences with ten participants each, there would be five audio channels been received, forty five audio channels been transmitted and fifty control channels been received and transmitted simultaneously by the MCUs.

Because JMF does not support traffic prioritization (the *Type of Service* – TOS or *Differentiated Services* fields in the IPv4 header), the current version of the conference system does not implement it.

3.2. Conference Control: Floor and Session Control

Floor and session control were built as a single conference control protocol transported over UDP. A control type identifier in the packet header differentiates floor and session control functionality. Each packet has a user identifier. Users can play the role of ordinary participants or room moderator (chairman). Floor and session control functionalities are available through and represented by the user's human-machine interface.

The conference control protocol permits ordinary participants to: ask to enter a conference room; leave the conference room; request the floor; give up the floor requisition and return the floor, after it has been granted to him/her.

Moderators control session admission and floor access and are able to: start, finish and configure conference rooms³; admit, reject and expel participants; grant or deny floor to any participant; take back the floor at anytime; request the floor, just to tell the current floor holder that he/she wants it back; permit or deny the MCU to forward the audio channel to any participant and elect a new moderator.

The conference room is represented in the user's interface by pictures of each participant in the conference. When the user clicks on someone's picture, a menu presenting available actions and information pops up. The available actions vary according to the user role in the conference and its current indication. Colored frames around user's picture represent user indications. Audio cues are played to the user, whenever the floor is granted to or taken from him/her or when the user is requesting admission in the conference. Audio cues are important, mostly when user attention is needed in different parts of the screen or in different windows. The user may be paying attention to the text *chat*, may be busy with another window or may even be distracted with something else.

Table 3 shows valid floor and session control indications and their associated audiovisual cues in the user interface.

³ By the time this paper was published, only the system administrator was able to accomplish these tasks.

Table 3. User indications, their meaning and audiovisual cues.

Indication	Meaning and audiovisual cue
<i>normal</i>	The participant is in the conference and there is no other indication more appropriated. No frame. If the previous user indication was <i>holdingFloor</i> , he/she hears a "punch".
<i>requestingFloor</i>	The participant is requesting the floor. Green frame.
<i>holdingFloor</i>	The participant holds the floor. Red frame. The user hears a pipe organ sound.
<i>noInformation</i>	The link between the participant and the MCU may be down. Yellow frame.
<i>noAudio</i>	The moderator has ordered the MCU not to forward audio packets to the participant. Cyan frame.
<i>expelled</i>	The participant was expelled from the conference and can no longer request admission until the moderator does not let him to come back. Black frame and picture with transparency.
<i>admissionPending</i>	The participant is requesting admission in the conference. Blue frame. The participant hears the phone ringing out, while the moderator hears the phone ringing in.
<i>absent</i>	The participant has a reserved chair in the conference room, but has not entered the conference yet. No frame and picture with transparency.

Figure 2 shows a screenshot of the user web page representing a virtual conference room with ten participants and with text communication.

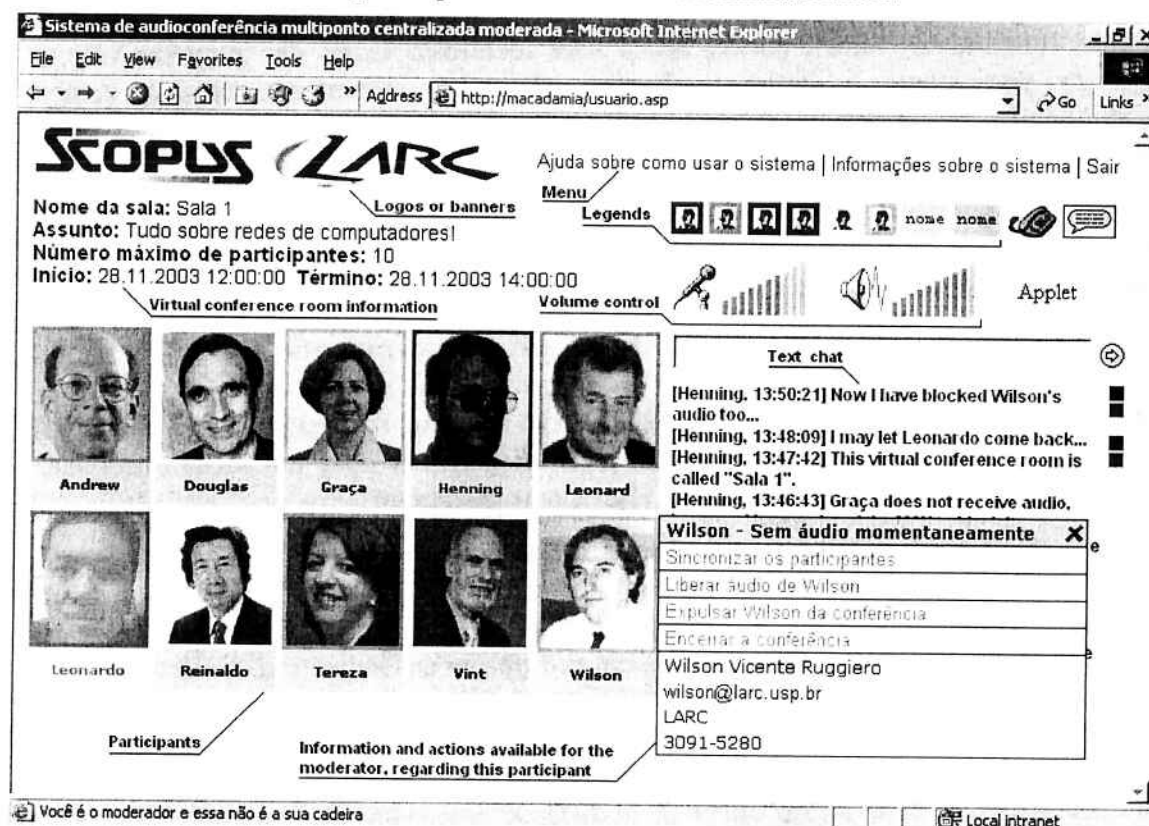


Figure 2. Screenshot of the user web page representing a virtual conference room (human-machine interface in Brazilian Portuguese).

Any user action implies the MCU to react accordingly. For example, if the moderator grants the floor to a participant, the MCU forwards the granting to all participants, so they can keep their human-machine interface synchronized. Then, the MCU starts waiting for the new floor holder's audio packets.

A double synchronization mechanism was implemented to keep users' interfaces coherent: through the conference control protocol and through HTTP requests and responses. User indication in the interface is changed when the applet receives a control packet or an acknowledgement from the MCU. Each time a user indication is changed, the user submits to the web server his/her new indication. When a new user enters the conference room, his/her interface is loaded with updated information and he/she becomes aware of other participants in the conference room. Synchronization problems arise when control packets are lost or arrive out of order and when server information become inconsistent, but synchronization is restored during operation or by an explicit synchronization request submitted to the web server.

The double synchronization mechanism could be replaced by a reliable conference control protocol delivery mechanism or with explicit synchronization packets sent periodically from the MCU to the participants informing who is in the conference and what is his/hers current indication.

4. Experimental Results

For a user, four characteristics of the conference system are important: usability, interactivity; voice subjective quality and bandwidth needed. Usability depends on how well the human-machine interface and the whole system were designed, while interactivity depends on the system's response time, in this case, network delay. Voice subjective quality is affected by the codec used, by packet loss and by delay. For the user, the bandwidth needed is important in order to know if he/she is able to use the system.

For the company hosting the conference system, three characteristics are important: bandwidth and processing costs and system scalability, which depends on bandwidth usage/availability and processing power. Bandwidth is still a costly resource, therefore, as lower its usage, the better for the company. The same goes to processing power.

Some experiments were made in order to evaluate the characteristics listed above. In the first one, the floor control will be tested as a mechanism for restricting bandwidth consumption in centralized conferences and the bandwidth needed by the user and by the company will be revealed. In the second one, delay and packet loss will be seen through the use of a real world scenario (remote tests), impacting the voice subjective quality and the interactivity. In the third experiment, the MCU's scalability will be tested, bringing information about the systems' bottlenecks. In the last one, a subjective experience will be exposed, revealing information about the usability of the conference system.

The codec used in all tests was the GSM, with three 20 ms audio frames being carried by each RTP packet. Each audio frame occupies 33 bytes, so, the size (S) of the resulting Ethernet frame is given by Equation (1).

$$\begin{aligned}
 S &= 14 \text{ B (Ethernet header)} + 20 \text{ B (IP header)} + 8 \text{ B (UDP header)} + 12 \text{ B (RTP header)} \\
 &\quad + 3 \times 33 \text{ B (GSM audio payload)} + 4 \text{ B (Ethernet FCS)} \\
 &= 157 \text{ B}
 \end{aligned}
 \tag{1}$$

Because GSM produces 20 ms audio frames, there are 50 audio frames per second. As the RTP is carrying three GSM audio frames per packet, 50/3 RTP packets per second are generated, increasing the codec delay from 20 ms to 60 ms, but lowering the bandwidth consumed by each audio channel from 36.400,0 bps ($B_{1\text{ GSM}}$) to 20.933,3 bps ($B_{3\text{ GSM}}$), as shown in Equations (2) and (3), respectively, because of less protocol overhead.

$$B_{1\text{ GSM}} = 91\text{ B} \times 8 \times 50 = 36.400,0 \text{ bps} \quad (2)$$

$$B_{3\text{ GSM}} = 157\text{ B} \times 8 \times 50/3 = 20.933,3 \text{ bps} \quad (3)$$

4.1. Floor Control and the Bandwidth Consumption in the Conference System

The first experiments were run in an Ethernet network and the bandwidth measurement was taken at the MCU, logging inbound and outbound audio RTP packets (RTP_RX and RTP_TX, respectively).

Two tests were made in order to show the floor control impact over the network bandwidth in a centralized conference. Test #1 (Figure 3, graph A) is a conference with two participants, while test #2 (Figure 3, graph B) is a conference with three participants.

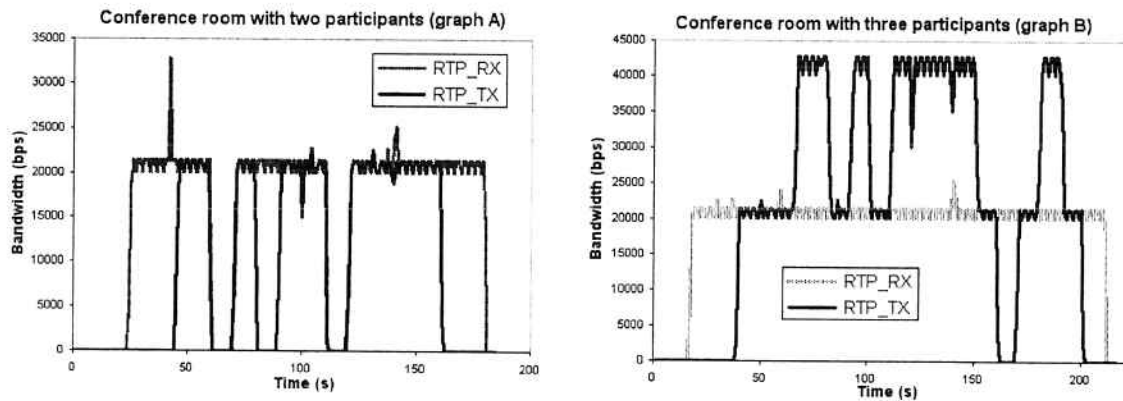


Figure 3. Network bandwidth measured at the multipoint control unit (MCU) in tests #1 (graph A) and #2 (graph B).

In test #1, when the moderator enters the conference room (around 20 s), he/she gains the floor and transmits its audio to the MCU. The MCU outgoing audio traffic is null, because there is no one to forward the packets to. When the second participant enters the conference (around 40 s), he/she starts transmitting his/her audio packets, because of NAPT issues, increasing the MCU's audio downstream until the participant receives a notification to stop transmitting. Although two audio streams are received by the MCU momentarily, the MCU only forwards the audio stream of the participant holding the floor, avoiding the increase of the audio upstream bandwidth. After the participant is admitted in the conference, the MCU starts forwarding the moderator's audio packets to him/her. When the moderator blocks his/her audio transmission by muting his/her microphone in his/her user interface (around 60 s), the MCU's audio downstream becomes null and the audio upstream too, consequently, because there are no packets to be forwarded. When the moderator blocks the participant's audio (around 80 s), then the MCU's audio upstream becomes null again. When the participant leaves the conference (around 160 s), the MCU's audio upstream becomes null again.

When the moderator is holding the floor and grants it to a participant (around 100 s in graph A and around 120 s in graph B), the MCU responds the floor granting with an acknowledgement control packet causing the moderator to stop transmitting. From this time on, the MCU will only forward the new floor holder audio stream, which has not yet starting transmitting it. After sending the ack, the MCU forwards the floor granting to all participants in the conference. For a short period of time no one is transmitting, because the moderator has already stopped his/her transmitter and the participant to whom the floor was granted has not yet started his/her. This explains the drop in both the audio upstream and the audio downstream.

When a participant is holding the floor and the moderator grants it to another one (around 140 s in graph A and around 200 s in graph B), the MCU receives the floor granting, responds with an acknowledgement packet and starts waiting for the audio stream of the new floor holder, who has not yet started transmitting. For a short period of time, both participants are transmitting their audio, until the previous floor holder receives and processes the notification to cease his/her transmission. This explains the drop in the audio upstream and the increase in the audio downstream.

The main difference between test #1 and #2 is the audio upstream bandwidth, because of the third participant. Both tests show that floor control restricts the MCU's audio downstream bandwidth to the bandwidth occupied by a single audio channel, except for short period of times due to NAPT issues and floor transitions.

Graphs *A* and *B* results just confirmed Equation (3) calculations on bandwidth.

Floor control as a mechanism for restricting bandwidth consumption served both the interests of the user and the company hosting the conference system, limiting the number of audio channels transmitted and received by them, reducing bandwidth usage and costs.

4.2. Remote Tests

Three remote tests were made in order to evaluate the impact of a more realistic scenario in the conference system: test #1, using a broadband cable modem Internet service provider (provider *X*); test #2 and #3 using two different popular free dial-up Internet service providers (provider *Y* and *Z*, respectively), trough an analog modem⁴.

In test #1 (Figure 4, network topology *A*), remote users *A* and *B* are located behind the same NAPT, while the server *S* is located in a different network. The equipment used as NAPT was a SMC Barricade 7004 ABR. Access to the Internet was provided by a Terayon TeraPro cable modem, connected at 256 kbps.

In tests #2 and #3 (Figure 4, network topology *B*), user *A* is the remote user, while user *B* and server *S* belong to the same network.

⁴ Internet service providers from São Paulo – SP – Brazil.

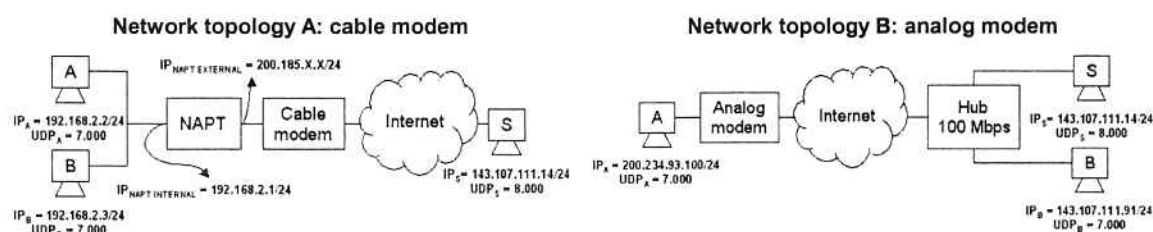


Figure 4. Network topologies for the remote tests.

Measurements were made⁵ using simple ICMP Echo Requests with 32 bytes of ICMP data transmitted from server *S* (IP address 143.107.111.14) to the external NATP interface, in test #1 and directly to the remote user, in tests #2 and #3. The distance in hops between the networks were measured by sending ICMP Echo Requests setting the IPv4 *Time to Live* field (TTL) until ICMP Echo Replies were received instead of ICMP TTL Expired In-Transit messages. The impact of traffic prioritization was tested setting the *Type of Service* field (TOS)⁶. It was not possible to accomplish a trace route test in order to determine the exact path between server *S* and the remote hosts in each situation, because the intermediate hops did not respond to the ICMP Echo Requests. Table 4 presents the results of the tests.

Table 4. Measurements taken in the remote tests.

Test	IP address	Technology and connection speed	TOS	Distance in hops	Packet Loss (%)	Round-trip time (ms)			Subjective evaluation
						Minimum	Average	Maximum	
#1	200.185.X.X ⁷	Cable modem @ 256 kbps (provider X)	0	13	6,5	20	40	110	Good
			224	13	12,5	20	41	120	
#2	200.234.93.100	Dial-up @ 52,0 kbps (provider Y)	0	12	56,5	761	827	841	Unacceptable
			224	12	71,2	180	189	240	
#3	200.207.179.98	Dial-up @ 50,6 kbps (provider Z)	0	10	0,0	160	170	183	Good
			224	10	0,0	160	166	181	

The tests show that the path from server *S* to provider's *Y* network is very clogged (high delay and high packet loss rate), while the paths to providers' networks *X* and *Z* may not be congested. This explains why traffic prioritization is only perceived in test #2. Traffic prioritization seems to have a negative impact on tests #1 and #2, causing the raise of the packet loss rate.

As the conference system still does not implement traffic prioritization, the overall experience in test #2 was definitely unsatisfactory, mainly due to the high packet

⁵ Measurements taken at 28 Nov. 2003, from 16:50:00 to 17:50:00.

⁶ On Windows-based machines, the command `ping -i <TTL> -v <TOS> <destination address>` sets both the time to live and type of service fields in the IPv4 header carrying the ICMP message. The ICMP Echo Reply is returned with the same TOS setting.

⁷ Full IP address omitted for security reasons.

loss rate and not due to the extremely high delay. Tests #1 and #3 were very satisfactory. Packet loss caused short interruptions in the audio and some non-critical synchronization problems⁸ in test #1. Users could not perceive any differences in test #1 and test #3, regarding the interactive experience, despite test #3 higher delay.

These remote tests have shown that packet loss has a more negative impact than a high delay for the conference system. The conference system worked flawlessly and transparently with the NAPT in test #1. Audio quality was normal in tests #1 and #3. In terms of responsiveness, the interactivity was excellent in tests #1 and #3, but test #2 was nearly impracticable.

4.3. Scalability Test

Scalability for the conference system is related to the maximum number of participants that can take part simultaneously in conferences and is mainly affected by the MCU's available network bandwidth and by the MCU's performance. Equation (3) shows that the codec used requires around 21 kbps per participant and the tests in Section 4.1 reveal that the MCU's uplink bandwidth grows linearly with the number of participants.

A virtual conference room with ten participants was used in this test, all of them belonging to the same local network (full-duplex Fast Ethernet) as the server, which was configured with a Pentium III 600 MHz processor and 512 MB of RAM.

The sniffer software used, Netasyst WLX version 1.0.003 from Network Associates Technology, does not consider the size of the FCS from the Ethernet layer, reporting the GSM packets to have 153 bytes, instead of 157 bytes.

The time needed to transmit an 157 bytes Ethernet frame (T_{frame}) is shown in Equation (4), already considering the Ethernet synchronism preamble, the start frame delimiter (SFD) and the interframe gap (IFG) [Seifert (2000)]. The theoretical maximum number of participants ($N_{theoretical}$) that could be served by the conference system corresponds to the maximum number of GSM packets that could be forwarded to the rest of the participants, before the next GSM packet is received by the MCU from the floor holder. This number is expressed in Equation (5) below.

$$T_{frame} = 8 \times (7 \text{ B} + 1 \text{ B} + 157 \text{ B} + 12 \text{ B}) / 100 \text{ Mbps} = 14,16 \mu\text{s} \quad (4)$$

$$N_{theoretical} = D / T_{frame} = 60 \text{ ms} / 14,16 \mu\text{s} = 4.237 \text{ participants} \quad (5)$$

Two response time were measured in order to evaluate the MCU's performance: the time taken by the MCU to start forwarding a valid RTP packet from the floor holder to the rest of the participants (T_{first}) and the time between forwarded packets (T_{next}).

Figure 5 shows the packets captured by the sniffer software and the delta time between them. Packets #1, #11, #21 and #31 are GSM packets received by the MCU from the floor holder. Packets #2 to #10, #12 to #19 and #22 to #29 are GSM packets forwarded to the rest of the participants. Although the MCU should receive a GSM packet each 60 ms (D), there is a very high jitter caused by the JMF transmitter⁹.

⁸ Non-critical synchronization problems: problems that were solved during normal operation or by an explicit synchronization request.

⁹ This behavior was verified in laboratory using JMF's sample applications.

Netasyst WLX (Trial Mode) - Local, Ethernet (Line speed at 100 Mbps) - [1safa10participants.cap: Decode, 32/708 Ethernet]

File Monitor Capture Display Tools Database Window Help

Default

No.	Source Address	Dest Address	Summary	Len (Bytes)	Delta Time	Rel. Time
1	[143.107.111.15]	[143.107.111.14]	UDP: D=20004 S=20004	153	0.000.000	0:00:00.000
2	[143.107.111.14]	[143.107.111.15]	UDP: D=20004 S=20004	153	0.000.453	0:00:00.000
3	[143.107.111.14]	[143.107.111.15]	UDP: D=1058 S=20004	153	0.000.160	0:00:00.000
4	[143.107.111.14]	[143.107.111.15]	UDP: D=20024 S=20004	153	0.000.143	0:00:00.000
5	[143.107.111.14]	[143.107.111.15]	UDP: D=20034 S=20004	153	0.000.146	0:00:00.000
6	[143.107.111.14]	[143.107.111.15]	UDP: D=20044 S=20004	153	0.000.142	0:00:00.001
7	[143.107.111.14]	[143.107.111.15]	UDP: D=20054 S=20004	153	0.000.145	0:00:00.001
8	[143.107.111.14]	[143.107.111.15]	UDP: D=20074 S=20004	153	0.000.145	0:00:00.001
9	[143.107.111.14]	[143.107.111.15]	UDP: D=20084 S=20004	153	0.000.145	0:00:00.001
10	[143.107.111.14]	[143.107.111.15]	UDP: D=20114 S=20004	153	0.000.146	0:00:00.001
11	[143.107.111.15]	[143.107.111.14]	UDP: D=20004 S=20004	153	0.087.973	0:00:00.089
12	[143.107.111.14]	[143.107.111.15]	UDP: D=20064 S=20004	153	0.000.447	0:00:00.090
13	[143.107.111.14]	[143.107.111.15]	UDP: D=1058 S=20004	153	0.000.162	0:00:00.090
14	[143.107.111.14]	[143.107.111.15]	UDP: D=20024 S=20004	153	0.000.144	0:00:00.090
15	[143.107.111.14]	[143.107.111.15]	UDP: D=20034 S=20004	153	0.000.146	0:00:00.090
16	[143.107.111.14]	[143.107.111.15]	UDP: D=20044 S=20004	153	0.000.143	0:00:00.090
17	[143.107.111.14]	[143.107.111.15]	UDP: D=20054 S=20004	153	0.000.146	0:00:00.090
18	[143.107.111.14]	[143.107.111.15]	UDP: D=20074 S=20004	153	0.000.145	0:00:00.090
19	[143.107.111.14]	[143.107.111.15]	UDP: D=20084 S=20004	153	0.000.144	0:00:00.091
20	[143.107.111.14]	[143.107.111.15]	UDP: D=20114 S=20004	153	0.000.148	0:00:00.091
21	[143.107.111.15]	[143.107.111.14]	UDP: D=20004 S=20004	153	0.064.468	0:00:00.155
22	[143.107.111.14]	[143.107.111.15]	UDP: D=20064 S=20004	153	0.000.389	0:00:00.156
23	[143.107.111.14]	[143.107.111.15]	UDP: D=1058 S=20004	153	0.000.160	0:00:00.156
24	[143.107.111.14]	[143.107.111.15]	UDP: D=20024 S=20004	153	0.000.144	0:00:00.156
25	[143.107.111.14]	[143.107.111.15]	UDP: D=20034 S=20004	153	0.000.147	0:00:00.156
26	[143.107.111.14]	[143.107.111.15]	UDP: D=20044 S=20004	153	0.000.145	0:00:00.156
27	[143.107.111.14]	[143.107.111.15]	UDP: D=20054 S=20004	153	0.000.145	0:00:00.156
28	[143.107.111.14]	[143.107.111.15]	UDP: D=20074 S=20004	153	0.000.144	0:00:00.156
29	[143.107.111.14]	[143.107.111.15]	UDP: D=20084 S=20004	153	0.000.145	0:00:00.157
30	[143.107.111.14]	[143.107.111.15]	UDP: D=20114 S=20004	153	0.000.146	0:00:00.157
31	[143.107.111.15]	[143.107.111.14]	UDP: D=20004 S=20004	153	0.045.276	0:00:00.202

Expert Decode Matrix Host Table Protocol Dist. Statistics

For Help, press F1

Figure 5. Packets captured by the sniffer software. Delta times are presented.

After receiving a valid RTP packet from the floor holder, the MCU takes approximately 450 μ s to forward the first GSM packet. This time is spent by the reception routine, validating the RTP header, determining if the packet belongs to the floor holder and if the UDP source port must be captured. After validation, the transmission routine verifies if the participant is allowed or is ready to receive the audio stream, changes the RTP header, the destination IP address, the destination UDP port and finally forwards the GSM packet to him/her. After the first GSM packet is forwarded, the MCU takes approximately 160 μ s to forward the second one and approximately 145 μ s to forward the next ones. This time is consumed by the MCU iterating through its participant's data structure and in the transmission routine.

Assuming T_{first} as 450 μ s, T_{next} as 160 μ s, the approximately real number of participants (N_{real}) that can be served by the MCU is given by Equation (6) below.

$$N_{real} = (D - T_{first})/T_{next} = (60 \text{ ms} - 0,500 \text{ ms})/0,160 \text{ ms} = 371 \text{ participants} \quad (6)$$

A virtual conference room with 371 participant would require an MCU with almost 10 Mbps of uplink. A room with such a high number of participants would be extremely difficult to be managed by the moderator. A more realistic scenario would be simultaneous conferences with a much smaller number of participants in each room. For each virtual conference room, the MCU receives one audio channel. For each RTP packet received, T_{first} must be considered. Adapting Equation (6) in order to consider m simultaneous conferences taking place produces Equation (7).

$$N_{real}(m) = [D - (m \times T_{first})]/T_{next} \quad (7)$$

As an example, the conference system hosting 10 simultaneous conferences would be able to serve 346 participants, approximately 35 participants per conference.

Tests made with two and three virtual conference rooms with five participants each showed no change in the response times. Stress testing the conference system without a very large number of computers would require a specially developed tool.

This test has shown that the MCU's bandwidth will frequently be the main bottleneck of the conference system. Besides, response time may be improved with higher clock speed processors and the MCUs could be distributed among servers with minor changes in the management website and placing the servers behind NATs properly configured with port forwarding for inbound traffic.

4.4. Subjective Evaluation

The floor holder has a very strange silence feeling, as he/she does not receive his/hers own audio. The audio cue helps the participant to recognize when he/she receives the floor, mainly when his/her attention is needed in different parts of the screen. Due to the lack of visual contact, the new floor holder uses to test the communication by asking "Are you hearing me?" or "If you hear me, send a text message!", turning the text communication into a feedback channel. The absence of visual communications also causes the participants to get more easily distracted.

Frequently, the floor holder forgets that his/hers question can only be answered if the floor is granted to the other participant. In turn, the listener many times forgets that his/hers words are not been heard by anyone and tries to interact with the floor holder without receiving the floor. When he/she receives the floor and hears the audio cue, he/she remembers that only now the other participants will be able to hear him/her.

Major communication problems arise when the participants try to use the conference system like in a phone call, when it was developed to reproduce a classroom, with an asymmetrical flow of information. However, when the system is used as a virtual classroom, with the teacher speaking most part of the time, after some practice all participants seem to get more comfortable with the floor control mechanism.

5. Conclusions and Future Work

Floor control has proved to be an efficient mechanism for restricting bandwidth consumption in centralized conferences. Further developments in the floor control protocol will seek robust synchronization for the participants and the abstraction of the resource type. When the conference system is used as a virtual classroom, the floor control mechanism shows itself appropriated for regulating the conversational flow.

The greatest strengths of the conference system developed are: the utilization of web-based technology, easing the integration with other systems and the customization of the human-machine interface; transparent NAT/NAPT operation; the use of floor control as a mechanism to restrict network bandwidth in conferences over IP and the codec independent MCU.

The absence of a proper return channel and the lack of mutual awareness are critical for the conversational flow and for raising the degree of interaction. The use of video would certainly help. Sending the mixed audio of all participants to the floor holder would be very processor intensive, would make the MCU codec dependent and

would considerably increase the bandwidth consumed by it, which is already the biggest bottleneck for the conference system's scalability.

Further studies are needed in order to find out a more efficient way to provide mutual awareness and fast feedback from the participants, without impacting significantly the consumed bandwidth. Qiu, Kuhns and Cox (2002) propose a solution to raise interactivity in decentralized conferences that could be adapted to centralized ones, with the MCU forwarding the audio from the participant determined by the moderator to the floor holder.

Regarding the conference system features, video and voting capabilities, a multi-user management website, IP multicast (shifting from the centralized to the hybrid or decentralized conference paradigms), quality of service mechanisms, audio stream cryptography and other security mechanisms are also among the enhancements planned.

Acknowledgements

This work is part of the Voice Chat project supported by Scopus Tecnologia S. A.¹⁰

References

- Crowley, T., Milazzo, P., Baker, E., Forsdick, H., Tomlinson, R. (1990) "MMConf: An infrastructure for building shared multimedia applications", In: Proceedings CSCW'90, p. 637-50, Oct.
- Dommel, H.-P., Garcia-Luna-Aceves, J. J. (1997) "Floor Control for Multimedia Conferencing and Collaboration", *Multimedia Systems*, vol. 5, no. 1, p. 23-38.
- Holdrege, M., Srisuresh, P. (1999) "IP Network Address Translator (NAT) Terminology and Considerations", RFC 2663, IETF, Aug., <http://www.ietf.org/rfc/rfc2663.txt>.
- Holdrege, M., Srisuresh, P. (2001) "Protocol Complications with the IP Network Address Translator", RFC 3027, IETF, Jan., <http://www.ietf.org/rfc/rfc3027.txt>.
- ITU-T Recommendation H.323v4 (2000) "Packet-based multimedia communications systems". International Telecommunications Union, Geneve.
- Qiu, R., Kuhns, F. Cox, J. (2002) "A Conference Control Protocol for Highly Interactive Video-conferencing", In: Proceedings of Globecom 2002, Taipei, Taiwan, Nov.
- Rosenberg, J. et al. (2002) "SIP: Session Initiation Protocol", RFC 3261, IETF, Jun., <http://www.ietf.org/rfc/rfc3261.txt>.
- Schulzrinne, H. et al. (1996) "RTP: A Transport Protocol for Real-Time Applications", RFC 1889, IETF, Jan., <http://www.ietf.org/rfc/rfc1889.txt>.
- Seifert, R. "The switch book: the complete guide to LAN switching technology". Ed. John Wiley & Sons, Inc., 2000. p 22-29.
- Senie, D. (2002) "Network Address Translator (NAT) – Friendly Application Design Guidelines", RFC 3235, IETF, Jan., <http://www.ietf.org/rfc/rfc3235.txt>.

¹⁰ Scopus Tecnologia S. A. Website: <http://www.scopus.com.br>. Accessed: 26.11.2003.

BOLETINS TÉCNICOS - TEXTOS PUBLICADOS

- BT/PCS/9301 - Interligação de Processadores através de Chaves Ômicron - GERALDO LINO DE CAMPOS, DEMI GETSCHKO
- BT/PCS/9302 - Implementação de Transparência em Sistema Distribuído - LUÍSA YUMIKO AKAO, JOÃO JOSÉ NETO
- BT/PCS/9303 - Desenvolvimento de Sistemas Especificados em SDL - SIDNEI H. TANO, SELMA S. S. MELNIKOFF
- BT/PCS/9304 - Um Modelo Formal para Sistemas Digitais à Nivel de Transferência de Registradores - JOSÉ EDUARDO MOREIRA, WILSON VICENTE RUGGIERO
- BT/PCS/9305 - Uma Ferramenta para o Desenvolvimento de Protótipos de Programas Concorrentes - JORGE KINOSHITA, JOÃO JOSÉ NETO
- BT/PCS/9306 - Uma Ferramenta de Monitoração para um Núcleo de Resolução Distribuída de Problemas Orientado a Objetos - JAIME SIMÃO SICHMAN, ELERI CARDOSO
- BT/PCS/9307 - Uma Análise das Técnicas Reversíveis de Compressão de Dados - MÁRIO CESAR GOMES SEGURA, EDIT GRASSIANI LINO DE CAMPOS
- BT/PCS/9308 - Proposta de Rede Digital de Sistemas Integrados para Navio - CESAR DE ALVARENGA JACOBY, MOACYR MARTUCCI JR.
- BT/PCS/9309 - Sistemas UNIX para Tempo Real - PAULO CESAR CORIGLIANO, JOÃO JOSÉ NETO
- BT/PCS/9310 - Projeto de uma Unidade de Matching Store baseada em Memória Paginada para uma Máquina Fluxo de Dados Distribuído - EDUARDO MARQUES, CLAUDIO KIRNER
- BT/PCS/9401 - Implementação de Arquiteturas Abertas: Uma Aplicação na Automação da Manufatura - JORGE LUIS RISCO BECERRA, MOACYR MARTUCCI JR.
- BT/PCS/9402 - Modelamento Geométrico usando do Operadores Topológicos de Euler - GERALDO MACIEL DA FONSECA, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/9403 - Segmentação de Imagens aplicada a Reconhecimento Automático de Alvos - LEONCIO CLARO DE BARROS NETO, ANTONIO MARCOS DE AGUIRRA MASSOLA
- BT/PCS/9404 - Metodologia e Ambiente para Reutilização de Software Baseado em Composição - LEONARDO PUJATTI, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/9405 - Desenvolvimento de uma Solução para a Supervisão e Integração de Células de Manufatura Discreta - JOSÉ BENEDITO DE ALMEIDA, JOSÉ SIDNEI COLOMBO MARTINI
- BT/PCS/9406 - Método de Teste de Sincronização para Programas em ADA - EDUARDO T. MATSUDA, SELMA SHIN SHIMIZU MELNIKOFF
- BT/PCS/9407 - Um Compilador Paralelizante com Detecção de Paralelismo na Linguagem Intermediária - HSUEH TSUNG HSIANG, LÍRIA MATSUMOTO SAITO
- BT/PCS/9408 - Modelamento de Sistemas com Redes de Petri Interpretadas - CARLOS ALBERTO SANGIORGIO, WILSON V. RUGGIERO
- BT/PCS/9501 - Síntese de Voz com Qualidade - EVANDRO BACCI GOUVÊA, GERALDO LINO DE CAMPOS
- BT/PCS/9502 - Um Simulador de Arquiteturas de Computadores "A Computer Architecture Simulator" - CLAUDIO A. PRADO, WILSON V. RUGGIERO
- BT/PCS/9503 - Simulador para Avaliação da Confiabilidade de Sistemas Redundantes com Reparo - ANDRÉA LUCIA BRAGA, FRANCISCO JOSÉ DE OLIVEIRA DIAS
- BT/PCS/9504 - Projeto Conceitual e Projeto Básico do Nível de Coordenação de um Sistema Aberto de Automação, Utilizando Conceitos de Orientação a Objetos - NELSON TANOMARU, MOACYR MARTUCCI JUNIOR
- BT/PCS/9505 - Uma Experiência no Gerenciamento da Produção de Software - RICARDO LUIS DE AZEVEDO DA ROCHA, JOÃO JOSÉ NETO
- BT/PCS/9506 - MétodoOO - Método de Desenvolvimento de Sistemas Orientado a Objetos: Uma Abordagem Integrada à Análise Estruturada e Redes de Petri - KECHI HIRAMA, SELMA SHIN SHIMIZU MELNIKOFF
- BT/PCS/9601 - MOOPP: Uma Metodologia Orientada a Objetos para Desenvolvimento de Software para Processamento Paralelo - ELISA HATSUE MORIYA HUZITA, LÍRIA MATSUMOTO SATO
- BT/PCS/9602 - Estudo do Espalhamento Brillouin Estimulado em Fibras Ópticas Monomodo - LUIS MEREGE SANCHES, CHARLES ARTUR SANTOS DE OLIVEIRA
- BT/PCS/9603 - Programação Paralela com Variáveis Compartilhadas para Sistemas Distribuídos - LUCIANA BEZERRA ARANTES, LÍRIA MATSUMOTO SATO
- BT/PCS/9604 - Uma Metodologia de Projeto de Redes Locais - TEREZA CRISTINA MELO DE BRITO CARVALHO, WILSON VICENTE RUGGIERO

- BT/PCS/9605 - Desenvolvimento de Sistema para Conversão de Textos em Fonemas no Idioma Português - DIMAS TREVIZAN CHBANE, GERALDO LINO DE CAMPOS
- BT/PCS/9606 - Sincronização de Fluxos Multimídia em um Sistema de Videoconferência - EDUARDO S. C. TAKAHASHI, STEFANIA STIUBIENER
- BT/PCS/9607 - A importância da Completeza na Especificação de Sistemas de Segurança - JOÃO BATISTA CAMARGO JÚNIOR, BENÍCIO JOSÉ DE SOUZA
- BT/PCS/9608 - Uma Abordagem Paraconsistente Baseada em Lógica Evidencial para Tratar Exceções em Sistemas de Frames com Múltipla Herança - BRÁULIO COELHO ÁVILA, MÁRCIO RILLO
- BT/PCS/9609 - Implementação de Engenharia Simultânea - MARCIO MOREIRA DA SILVA, MOACYR MARTUCCI JÚNIOR
- BT/PCS/9610 - Statecharts Adaptativos - Um Exemplo de Aplicação do STAD - JORGE RADY DE ALMEIDA JUNIOR, JOÃO JOSÉ NETO
- BT/PCS/9611 - Um Meta-Editor Dirigido por Sintaxe - MARGARETE KEIKO IWAI, JOÃO JOSÉ NETO
- BT/PCS/9612 - Reutilização em Software Orientado a Objetos: Um Estudo Empírico para Analisar a Dificuldade de Localização e Entendimento de Classes - SELMA SHIN SHIMIZU MELNIKOFF, PEDRO ALEXANDRE DE OLIVEIRA GIOVANI
- BT/PCS/9613 - Representação de Estruturas de Conhecimento em Sistemas de Banco de Dados - JUDITH PAVÓN MENDONZA, EDIT GRASSIANI LINO DE CAMPOS
- BT/PCS/9701 - Uma Experiência na Construção de um Tradutor Inglês - Português - JORGE KINOSHITA, JOÃO JOSÉ NETO
- BT/PCS/9702 - Combinando Análise de "Wavelet" e Análise Entrópica para Avaliar os Fenômenos de Difusão e Correlação - RUI CHUO HUEI CHIOU, MARIA ALICE G. V. FERREIRA
- BT/PCS/9703 - Um Método para Desenvolvimento de Sistemas de Computacionais de Apoio a Projetos de Engenharia - JOSÉ EDUARDO ZINDEL DEBONI, JOSÉ SIDNEI COLOMBO MARTINI
- BT/PCS/9704 - O Sistema de Posicionamento Global (GPS) e suas Aplicações - SÉRGIO MIRANDA PAZ, CARLOS EDUARDO CUGNASCA
- BT/PCS/9705 - METAMBI-OO - Um Ambiente de Apoio ao Aprendizado da Técnica Orientada a Objetos - JOÃO UMBERTO FURQUIM DE SOUZA, SELMA S. S. MELNIKOFF
- BT/PCS/9706 - Um Ambiente Interativo para Visualização do Comportamento Dinâmico de Algoritmos - IZAURA CRISTINA ARAÚJO, JOÃO JOSÉ NETO
- BT/PCS/9707 - Metodologia Orientada a Objetos e sua Aplicação em Sistemas de CAD Baseado em "Features" - CARLOS CÉSAR TANAKA, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/9708 - Um Tutor Inteligente para Análise Orientada a Objetos - MARIA EMÍLIA GOMES SOBRAL, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/9709 - Metodologia para Seleção de Solução de Sistema de Aquisição de Dados para Aplicações de Pequeno Porte - MARCELO FINGUERMAN, JOSÉ SIDNEI COLOMBO MARTINI
- BT/PCS/9801 - Conexões Virtuais em Redes ATM e Escalabilidade de Sistemas de Transmissão de Dados sem Conexão - WAGNER LUIZ ZUCCHI, WILSON VICENTE RUGGIERO
- BT/PCS/9802 - Estudo Comparativo dos Sistemas da Qualidade - EDISON SPINA, MOACYR MARTUCCI JR.
- BT/PCS/9803 - The VIBRA Multi-Agent Architecture: Integrating Purposive Vision With Deliberative and Reactive Planning - REINALDO A. C. BIANCHI, ANNA H. REALI C. RILLO, LELIANE N. BARROS
- BT/PCS/9901 - Metodologia ODP para o Desenvolvimento de Sistemas Abertos de Automação - JORGE LUIS RISCO BECCERRA, MOACYR MARTUCCI JUNIOR
- BT/PCS/9902 - Especificação de Um Modelo de Dados Bitemporal Orientado a Objetos - SOLANGE NICE ALVES DE SOUZA, EDIT GRASSIANI LINO DE CAMPOS
- BT/PCS/9903 - Implementação Paralela Distribuída da Dissecção Cartesiana Aninhada - HILTON GARCIA FERNANDES, LIRIA MATSUMOTO SATO
- BT/PCS/9904 - Metodologia para Especificação e Implementação de Solução de Gerenciamento - SERGIO CLEMENTE, TEREZA CRISTINA MELO DE BRITO CARVALHO
- BT/PCS/9905 - Modelagem de Ferramenta Hiperídia Aberta para a Produção de Tutoriais Interativos - LEILA HYODO, ROMERO TORI
- BT/PCS/9906 - Métodos de Aplicações da Lógica Paraconsistente Anotada de Anotação com Dois Valores-LPA2v com Construção de Algoritmo e Implementação de Circuitos Eletrônicos - JOÃO I. DA SILVA FILHO, JAIR MINORO ABE
-
- BT/PCS/9907 - Modelo Nebuloso de Confiabilidade Baseado no Modelo de Markov - PAULO SÉRGIO CUGNASCA, MARCO TÚLIO CARVALHO DE ANDRADE

- BT/PCS/9908 – Uma Análise Comparativa do Fluxo de Mensagens entre os Modelos da Rede Contractual (RC) e Colisões Baseada em Dependências (CBD) – MÁRCIA ITO, JAIME SIMÃO SICHMAN
- BT/PCS/9909 – Otimização de Processo de Inserção Automática de Componentes Eletrônicos Empregando a Técnica de Times Assíncronos – CESAR SCARPINI RABAK, JAIME SIMÃO SICHMAN
- BT/PCS/9910 – MIISA – Uma Metodologia para Integração da Informação em Sistemas Abertos – HILDA CARVALHO DE OLIVEIRA, SELMA S. S. MELNIKOFF
- BT/PCS/9911 – Metodologia para Utilização de Componentes de Software: um estudo de Caso – KAZUTOSI TAKATA, SELMA S. S. MELNIKOFF
- BT/PCS/0001 – Método para Engenharia de Requisitos Norteados por Necessidades de Informação – ARISTIDES NOVELLI FILHO, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0002 – Um Método de Escolha Automática de Soluções Usando Tecnologia Adaptativa – RICARDO LUIS DE AZEVEDO DA ROCHA, JOÃO JOSÉ NETO
- BT/PCS/0101 – Gerenciamento Hierárquico de Falhas – JAMIL KALIL NAUFAL JR., JOÃO BATISTA CAMARGO JR.
- BT/PCS/0102 – Um Método para a Construção de Analisadores Morfológicos, Aplicado à Língua Portuguesa, Baseado em Autômatos Adaptativos – CARLOS EDUARDO DANTAS DE MENEZES, JOÃO JOSÉ NETO
- BT/PCS/0103 – Educação pela Web: Metodologia e Ferramenta de Elaboração de Cursos com Navegação Dinâmica – LUISA ALEYDA GARCIA GONZÁLEZ, WILSON VICENTE RUGGIERO
- BT/PCS/0104 – O Desenvolvimento de Sistemas Baseados em Componentes a Partir da Visão de Objetos – RENATA EVANGELISTA ROMARIZ RECCO, JOÃO BATISTA CAMARGO JÚNIOR
- BT/PCS/0105 – Introdução às Gramáticas Adaptativas – MARGARETE KEIKO IWAI, JOÃO JOSÉ NETO
- BT/PCS/0106 – Automação dos Processos de Controle de Qualidade da Água e Esgoto em Laboratório de Controle Sanitário – JOSÉ BENEDITO DE ALMEIDA, JOSÉ SIDNEI COLOMBO MARTINI
- BT/PCS/0107 – Um Mecanismo para Distribuição Segura de Vídeo MPEG – CÍNTIA BORGES MARGI, GRAÇA BESSAN, WILSON VICENTE RUGGIERO
- BT/PCS/0108 – A Dependence-Based Model for Social Reasoning in Multi-Agent Systems – JAIME SIMÃO SICHMAN
- BT/PCS/0109 – Ambiente Multilinguagem de Programação – Aspectos do Projeto e Implementação – APARECIDO VALDEMIR DE FREITAS, JOÃO JOSÉ NETO
- BT/PCS/0110 – LETAC: Técnica para Análise de Tarefas e Especificação de Fluxo de Trabalho Cooperativo – MARCOS ROBERTO GREINER, LUCIA VILELA LEITE FILGUEIRAS
- BT/PCS/0111 – Modelagem ODP para o Planejamento de Sistemas de Potência – ANIRIO SALLES FILHO, JOSÉ SIDNEI COLOMBO MARTINI
- BT/PCS/0112 – Técnica para Ajuste dos Coeficientes de Quantização do Padrão MPEG em Tempo Real – REGINA M. SILVEIRA, WILSON V. RUGGIERO
- BT/PCS/0113 – Segmentação de Imagens por Classificação de Cores: Uma Abordagem Neural – ALEXANDRE S. SIMÕES, ANNA REALI COSTA
- BT/PCS/0114 – Uma Avaliação do Sistema DSM Nautilus – MARIO DONATO MARINO, GERALDO LINO DE CAMPOS
- BT/PCS/0115 – Utilização de Redes Neurais Artificiais para Construção de Imagem em Câmara de Cintilação – LUIZ SÉRGIO DE SOUZA, EDITH RANZINI
- BT/PCS/0116 – Simulação de Redes ATM – HSU CHIH WANG CHANG, WILSON VICENTE RUGGIERO
- BT/PCS/0117 – Application of Monoprocessed Architecture for Safety Critical Control Systems – JOSÉ ANTONIO FONSECA, JORGE RADY DE ALMEIDA JR.
- BT/PCS/0118 – WebBee – Um Sistema de Informação via WEB para Pesquisa de Abelhas sem Ferrão – RENATO SOUSA DA CUNHA, ANTONIO MOURA SARAIVA
- BT/PCS/0119 – Parallel Processing Applied to Robot Manipulator Trajectory Planning – DENIS HAMILTON NOMIYAMA, LÍRIA MATSUMOTO SATO, ANDRÉ RIYUITI HIRAKAWA
- BT/PCS/0120 – Utilização de Padrão de Arquitetura de Software para a Fase de Projeto Orientado a Objetos – CRISITINA MARIA FERREIRA DA SILVA, SELMA SHIN SHIMIZU MELNIKOFF
- BT/PCS/0121 – Agilizando Aprendizagem por Reforço Através do uso de Conhecimento sobre o Domínio – RENÊ PEGORARO, ANNA H. REALI COSTA
- BT/PCS/0122 – Modelo de Segurança da Linguagem Java Problemas e Soluções – CLAUDIO MASSANORI MATAYOSHI, WILSON VICENTE RUGGIERO
- BT/PCS/0123 – Proposta de um Agente CNM para o Gerenciamento Web de um Backbone ATM – FERNANDO FROTA REDÍGOLO, TEREZA CRISTINA MELO DE BRITO CARVALHO
- BT/PCS/0124 – Um Método de Teste de software Baseado em Casos Teste – SÉRGIO RICARDO ROTTA, KECHI HIRAMA

- BT/PCS/0201 – A Teoria Nebulosa Aplicada a uma Bicicleta Ergométrica para Fisioterapia – MARCO ANTONIO GARMS, MARCO TÚLIO CARVALHO DE ANDRADE
- BT/PCS/0202 – Synchronization Constraints in a Concurrent Object Oriented Programming Model – LAÍS DO NASCIMENTO SALVADOR, LIRIA MATSUMOTO SATO
- BT/PCS/0203 – Construção de um Ambiente de Dados sobre um Sistema de Arquivos Paralelos – JOSÉ CRAVEIRO DA COSTA NETO, LIRIA MATSUMOTO SATO
- BT/PCS/0204 – Maestro: Um Middleware para Suporte a Aplicações Distribuídas Baseadas em Componentes de Software – CLÁUDIO LUÍS PEREIRA FERREIRA, JORGE LUÍS RISCO BECERRA
- BT/PCS/0205 – Sistemas de Automação dos Transportes (ITS) Descritos Através das Técnicas de Modelagem RM-OPD (ITU-T) e UML (OMG) – CLÁUDIO LUIZ MARTE, JORGE LUÍS RISCO BECERRA, JOSÉ SIDNEI COLOMBO
- BT/PCS/0206 – Comparação de Perfis de Usuários Coletados Através do Agente de Interface PersonalSearcher – GUSTAVO A. GIMÉNEZ LUGO, ANALÍA AMANDI, JAIME SIMÃO SICHMAN
- BT/PCS/0207 – Arquitetura Reutilizáveis para a Criação de Sistemas de Tutorização Inteligentes – MARCO ANTONIO FURLAN DE SOUZA, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0208 – Análise e Predição de Desempenho de Programas Paralelos em Redes de Estações de Trabalho – LIN KUAN CHING, LIRIA MATSUMOTO SATO
- BT/PCS/0209 – Previsões Financeiras Através de Sistemas Neuronebulosos – DANIEL DE SOUZA GOMES, MARCO TÚLIO CARVALHO DE ANDRADE
- BT/PCS/0210 – Proposta de Arquitetura Aberta de Central de Atendimento – ANA PAULA GONÇALVES SERRA, MOACYR MARTUCCI JÚNIOR
- BT/PCS/0211 – Alternativas de Implementação de Sistemas Nebulosos em Hardware – MARCOS ALVES PREDEBON, MARCO TÚLIO CARVALHO DE ANDRADE
- BT/PCS/0212 – Registro de Imagens de Documentos Antigos – VALGUIMA VICTORIA VIANA ODAKURA MARTINEZ, GERALDO LINO DE CAMPOS
- BT/PCS/0213 – Um Modelo de Dados Multidimensional – PEDRO WILLEMSSENS, JORGE RADY DE ALMEIDA JUNIOR
- BT/PCS/0214 – Autômatos Adaptativos no Tratamento Sintático de Linguagem Natural – CÉLIA YUMI OKANO TANIWAKI, JOÃO JOSÉ NETO
- BT/PCS/0215 – Fatores e Subfatores para Avaliação da Segurança em Software de Sistemas Críticos – JOÃO EDUARDO PROENÇA PÁSCOA, JOÃO BATISTA CAMARGO JÚNIOR
- BT/PCS/0216 – Derivando um Modelo de Projeto a Partir de um Modelo de Análise, com Base em Design Patterns J2EE – SERGIO MARTINS FERNANDES, SELMA SHIN SHIMIZU MELNIKOFF
- BT/PCS/0217 – Domínios Virtuais para Redes Móveis Ad Hoc: Um Mecanismo de Segurança – LEONARDO AUGUSTO MARTUCCI, TEREZA CRISTINA DE MELO BRITO CARVALHO
- BT/PCS/0218 – Uma Ferramenta para a Formulação de Consultas Baseadas em Entidades e Papéis – ANDRÉ ROBERTO DORETO SANTOS, EDIT GRASSIANI LINO CAMPOS
- BT/PCS/0219 – Avaliação de Performance de Arquiteturas para Computação de Alto Desempenho – KARIN STRAUSS, WILSON VICENTE RUGGIERO
- BT/PCS/0220 – BGLsim: Simulador de Sistema Completo para o Blue Gene/L – LUÍS HENRIQUE DE BARROS CEZE, WILSON VICENTE RUGGIERO
- BT/PCS/0221 – μ P: Uma Solução de Micropagamentos – PEDRO ANCONA LOPEZ MINDLIN, TEREZA CRISTINA MELO DE BRITO CARVALHO
- BT/PCS/0222 – Modelamento de Roteadores IP para Análise de Atraso – MARCELO BLANES, GRAÇA BRESSAN
- BT/PCS/0223 – Uma Biblioteca de Classes Utilizando Java 3D para o Desenvolvimento de Ambientes Virtuais Multi-Usuários – RICARDO NAKAMURA, ROMERO TORI
- BT/PCS/0224 – Interactive 3D Physics Experiments Through the Internet – ALEXANDRE CARDOSO, ROMERO TORI
- BT/PCS/0225 – Avaliação do Desempenho de Aplicações Distribuídas sob Duas Velocidades de Rede – AMILCAR ROSA PEREIRA, GERALDO LINO DE CAMPOS
- BT/PCS/0226 – Acompanhamento do Aprendizado do Aluno em Cursos a Distância através da WEB: Metodologias e Ferramentas – LUCIANA APARECIDA MARTINEZ ZAINA, GRAÇA BRESSAN
- BT/PCS/0227 – Um Ambiente Colaborativo para Simulação de Redes de Computadores – OSCAR DANTAS VILCACHAGUA, GRAÇA BRESSAN
- BT/PCS/0301 – Diretrizes para o Projeto de Base de Dados Distribuídas – PEDRO LUIZ PIZZIGATTI CORRÊA, JORGE RADY DE ALMEIDA JR.
- BT/PCS/0302 – Análise e Predição de Desempenho de Programas MPI em Redes de Estações de Trabalho – JEAN MARCOS LAINE, EDSON T. MIDORIKAWA

- BT/PCS/0303 – Padrões de Software para Tutores Inteligentes Cooperativos em Engenharia de Requisitos – MARIA EMILIA GOMES SOBRAL, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0304 – Performance Analysis and Prediction of Some MPI Communication Primitives – HÉLIO MARCI DE OLIVEIRA, EDSON TOSHIMI MIDORIKAWA
- BT/PCS/0305 – RM-ODP para Expressar o Licenciamento Nuclear – EDILSON DE ANDRADE BARBOSA, MOACYR MARTUCCI JUNIOR
- BT/PCS/0306 – Modelo de Avaliação para Métricas de Software – VINICIUS DA SILVA ALMENDRA, KECHI HIRAMA
- BT/PCS/0307 – Análise de Confiabilidade de Sistemas Redundantes de Armazenamento em Discos Magnéticos – ENDERSON FERREIRA, JORGE RADY DE ALMEIDA JUNIOR
- BT/PCS/0308 – Utilizando Realidade Virtual e Objetos Distribuídos na Construção de uma Ferramenta de Aprendizagem Colaborativa – O Projeto Piaget – ISMAR FRANGO SILVEIRA, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0309 – Construção de Base de Conhecimento em Prolog a partir de Páginas HTML – WAGNER TOSCANO, EDSON SATOSHI GOMI
- BT/PCS/0310 – Verificação de Segurança em Confluência de Trajetórias de Aeronaves Utilizando Autômatos Híbridos – ÍTALO ROMANI DE OLIVEIRA, PAULO SÉRGIO CUGNASCA
- BT/PCS/0311 – Sistemas de Reconhecimento Biométrico Aplicados à Segurança de Sistemas de Informação – VILMAR DE SOUZA MACHADO, JORGE RADY DE ALMEIDA JUNIOR
- BT/PCS/0312 – Análise Comparativa de Arquiteturas Híbridas Intserv-Diffserv Utilizadas para Obtenção de QoS Fim-a-Fim em Redes IP – CARLOS A. A. BENITES, GRAÇA BRESSAN
- BT/PCS/0313 – Proposta para Otimização de Desempenho do Protocolo TCP em Redes Wireless 802.11 – ANDRÉ AGUIAR SANTANA, TEREZA CRISTINA DE MELO BRITO CARVALHO
- BT/PCS/0314 – Using the Moise + Model for a Cooperative Framework of MAS Reorganization – JOMI FRED HUBENER, JAIME SIMÃO SICHMAN
- BT/PCS/0315 – Ferramenta para Acompanhamento da Participação do Aluno em Sessões de Fórum Aplicada no Ensino a Distância via Web – GUSTAVO BIANCHI CINELLI, GRAÇA BRESSAN
- BT/PCS/0316 – Uma Infra-Estrutura para Agentes Arrematantes em Múltiplos Leilões Simultâneos – PAULO ANDRÉ LIMA DE CASTRO, JAIME SIMÃO SICHMAN
- BT/PCS/0317 – Reutilização de Software Através de Geração de Código e de Desenvolvimento de Componentes – Estudo de Caso – FÁBIO FÚRIA SILVA, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0318 – Detecção Automática das Transições de Corte e Fades – IZAURA CRISTINA ARAÚJO, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0319 – Educação a Distância e a Web Semântica: Modelagem Ontológica de Materiais e Objetos de Aprendizagem para Plataforma CoL – MOYSÉS DE ARAÚJO, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0320 – Análise da Aplicação dos Padrões TMN no Gerenciamento de Sistemas de CRM – SANDRO ANTÔNIO VICENTE, MOACYR MARTUCCI JR
- BT/PCS/0321 – Alinhamento de Corpus Bilingües: Modelos e Aplicações – JOSÉ FONTEBASSO, JORGE KINOSHITA
- BT/PCS/0322 – Arquitetura de Integração dos Sistemas CORBA e Fieldbus: Aplicação do Padrão ODP – DANTE LINCOLN CAROAJULCA TANTALEÁN, JORGE LUIS RISCO BECERRA
- BT/PCS/0401 – Resultados Obtidos com a Implantação de um Ambiente para o Desenvolvimento de uma Maturidade em Engenharia de Software – LUIZ RICARDO BEGOSSO, LUCIA VILELA FILGUEIRAS
- BT/PCS/0402 – Procedimentos para Elaboração do Modelo de Análise UML com Características de Testabilidade – ROGÉRIA CRISTIANE GRATÃO DE SOUZA, SELMA SHIN SHIMIZU MELNIKOFF
- BT/PCS/0403 – INTEREXPO3D – Uma Ferramenta para Geração de Exposições Virtuais 3D Interativas – ANDRÉA ZOTOVICI, ROMERO TORI
- BT/PCS/0404 – Metodologia para Especificação e Implementação de Solução de Gerenciamento – SÉRGIO CLEMENTI, TEREZA CRISTINA MELO DE BRITO CARVALHO
- BT/PCS/0405 – CPAR - Cluster: Um Ambiente de Execução para Clusters de Nós Mono e Multiprocessadores – GISELE DA SILVA CRAVEIRO, LIRIA MATSUMOTO SATO
- BT/PCS/0406 – Monitores de Execução de Software para Sistemas Similares de Mesma Funcionalidade – SÉRGIO RICARDO ROTA, JORGE RADY DE ALMEIDA JR.
- BT/PCS/0407 – Avaliação do Perigo de Colisão entre Aeronaves em Operação de Aproximação em Pistas de Aterrissagem Paralelas – PAULO HIDESHI OGATA, JOÃO BATISTA CAMARGO JR.
- BT/PCS/0408 – Integration of Ontologies and Organization Models: A MAS View – GUSTAVO GIMENEZ LUGO, JAIME SIMÃO SICHMAN
- BT/PCS/0409 – The use Heuristics to Speedup Reinforcement Learning – REINALDO AUGUSTO DA COSTA BIANCHI, ANNA HELENA REALI COSTA

- BT/PCS/0410 – Gestão de QOS na Visão ODP: Uma Aplicação na Arquitetura SLM – CRISTINA MORI MIYATA, JORGE LUIS RISCO BECERRA
- BT/PCS/0411 – Proposta de um Modelo Simplificado de Aquisição de Software para Pequenas Empresas – PAULO SÉRGIO BRANDÃO LIMA, LÚCIA VILELA LEITE FILGUEIRAS
- BT/PCS/0412 – Avaliação da Carga Mental de Trabalho na Operação de Interfaces Homem - Computador de Sistemas de Controle de Processo – JOSÉ LUIZ LOPES ALVES, LÚCIA VILELA LEITE FILGUEIRAS
- BT/PCS/0413 – Identificação de Aspectos de Desenho de Interface de Documentos Hiperídia Educacionais que Influenciam na aprendizagem e Propostas de Utilização – RENATO JOSUÉ DE CARVALHO, MARIA ALICE GRIGAS VARELLA FERREIRA
- BT/PCS/0501 – Representação Gramatical Adaptativa com Verificação de Aparência de Linguagens Dependentes de Contexto – CÉSAR ALBERTO BRAVO PARIENTE, JOÃO JOSÉ NETO
- BT/PCS/0502 – PartNet+: Simulando Parcerias entre Múltiplos Agentes – JULIO DE LIMA DO RÊGO MONTEIRO, JAIME SIMÃO SICHMAN
- BT/PCS/0503 – Um Processo de Transformação de Arquiteturas de Sistemas Legados Baseado em Reengenharia – RODRIGO ALVARES DE SOUZA, REGINALDO ARAKAKI
- BT/PCS/0504 – Uma Proposta de Ontologia para Plano de Projeto – LUIS ALVES FERREIRA FILHO, EDSON SATOSHI GOMI
- BT/PCS/0505 – Ensino de Arquitetura de Computadores Utilizando Simuladores Completos – ANDRÉ EVANDRO LOURENÇO, EDSON TOSHIMI MIDORIKAWA
- BT/PCS/0506 – Armazenamento de Documentos XML "Text-Centric" e "Data-Centric" em Sistemas Relacionais e Objeto-Relacionais – CLÓVIS KIYOHIDE HANASHIRO, EDIT GRASSIANI LINO DE CAMPOS
- BT/PCS/0507 – Integração ODP – CIM para Definição de Arquitetura de Sistema de Informação: Uma Aplicação na Qualidade de Distribuição de Energia Elétrica – PEDRO SOUZA ROSA, JORGE LUIS RISCO BECERRA
- BT/PCS/0508 – Uma Ferramenta de Apoio para a Gestão do Conhecimento com Base em Representação por Mapas – SIDNEI NICOLI, EDISON SPINA
- BT/PCS/0509 – Modelo de Serviços e Arquitetura para Alocação Dinâmica de Recursos com MPLS-TE – Vivian Bastos Dias, Tereza Cristina Melo de Brito Carvalho
- BT/PCS/0510 – Atena: Um Sistema para Suporte ao Planejamento na Área de Gestão de Projetos – FABRÍCIO JAILSON BARTH, EDSON SATOSHI GOMI